CLASSIC TRADE LADDER. EN 131-PROFESSIONAL ALUMINIUM EXTENSION LADDERS.



Manufactured to the latest cutting-edge standard

- > Meets new improved strength & slip-tests in BS EN131-2:2010 + A2:2017
- > Stabiliser comes as standard on all ladders that extend beyond 3m for maximum safety
- > Rated to a maximum load and duty rating of 150kgs.

British design for maximum safety, comfort & durability

- > Large 32mm serrated Trilobular rungs with 3-way crimp & swage design for maximum durability and comfort when working at height
- > Rungs orientate flat when erected at correct climbing angle to give stable standing surface
- > Deep serrated rubber feet for maximum grip on all surfaces
- > Heavy duty galvanised steel locking catch standard on all extension ladders.







BRITISH MADE PRODUCTS. SINCE 1933.





TITAN CLASSIC TRADE LADDER. SPECIFICATION.





Front View Extended Length Top Horn 3 Rung Overlap Overlap Rung Pitch Rung Pitch Receiver Front View Extended Length Extended Length

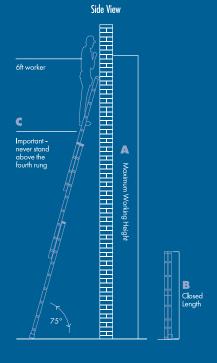



All dimensions in metre. All measurements are nominal

SINGLE LADDERS

		A	В	C	
Product SKU	No. of Rungs	Max Working Height**	Length	Max Standing Height*	Weight (kg)
CLA25S	9	3.0	2.5	1.4	6.0
CLA30S	-11	3.5	3.0	1.9	7.0
CLA35S	13	3.9	3.5	2.3	8.0
CLA40S	15	4.4	4.0	2.8	9.0
CLA45S	17	4.9	4.5	3.3	10.0
CLA50S	19	5.4	5.0	3.8	11.0
CLA55S	21	5.8	5.5	4.2	12.0

*Max Standing height is on the 4th rung down. **Max Working height is calculated as Max Standing height + 1.6m

DOUBLE EXTENSION LADDERS

		A	В	C	D	E	
Product SKU	No. of Rungs	Max Working Height**	Closed Length	Max Standing Height*	Depth	Extended Length	Weight (kg)
CLA25D	2 x 9	4.4	2.5	2.8	0.14	4.0	11.5
CLA30D	2 x 11	5.4	3.0	3.8	0.14	5.0	13.5
CLA35D	2 x 13	6.3	3.5	4.7	0.14	6.0	15.5
CLA40D	2 x 15	7.2	4.0	5.6	0.15	7.0	19.5
CLA45D	2 x 17	8.2	4.5	6.6	0.17	8.0	24.0
CLA50D	2 x 19	9.1	5.0	7.5	0.17	9.0	27.0
CLA55D	2 x 21	10.1	5.5	8.5	0.17	10.0	32.0

TRIPLE EXTENSION LADDERS

		A	В	C	D	E	
Product SKU	No. of Rungs	Max Working Height**	Closed Length	Max Standing Height*	Depth	Extended Length	Weight (kg)
CLA25T	3 x 9	5.8	2.5	4.2	0.23	5.5	18.4
CLA30T	3 x 11	7.2	3.0	5.6	0.23	7.0	22.5
CLA35T	3 x 13	8.6	3.5	7.0	0.23	8.5	29.0
CLA40T	3 x 15	10.1	4.0	8.5	0.24	10.0	34.0

COMMON DIMENSIONS

F	G	н	1	J	K
Bottom Horn	Rung Pitch	Top Horn	Top Section Outside Width	Middle Section Outside Width	Stabiliser Length
0.26	0.25	0.27	0.34	0.41	1.0m (<5.0m extended length) 1.2m (>5.0m extended length)

TITAN

OF BRITISH PRODUCTS.
OF SAFETY STANDARDS.
OF WORKING AT
HEIGHT EQUIPMENT.